



DATA BASED ON :

SATURATED AIR AT 68°F (20°C)
 SERVICE LIQUID WATER
 SERVICE LIQUID TEMPERATURE 59°F (15°C)
 DISCHARGE PRESSURE 1013 mbar

CAPACITY AND ABSORBED
 POWER TOLERANCE: ±5%

PERFORMANCE DATA
 LIQUID RING VACUUM PUMP
 TRAVAINI PUMP MODEL

TRVK 2503

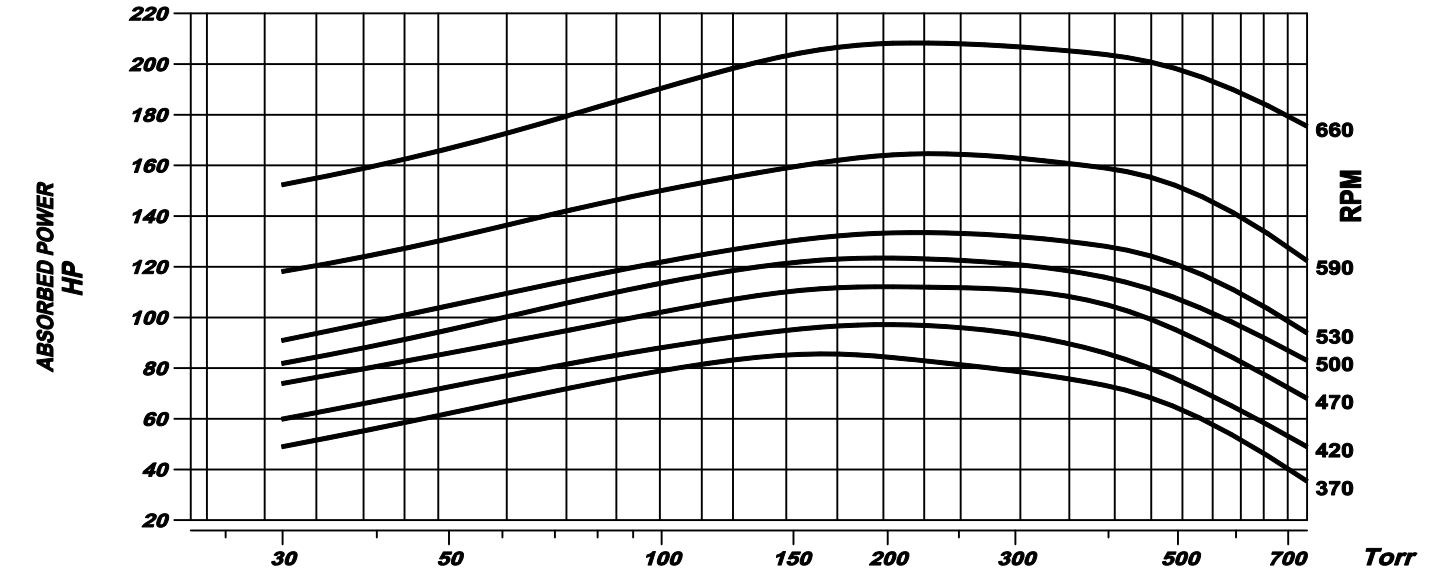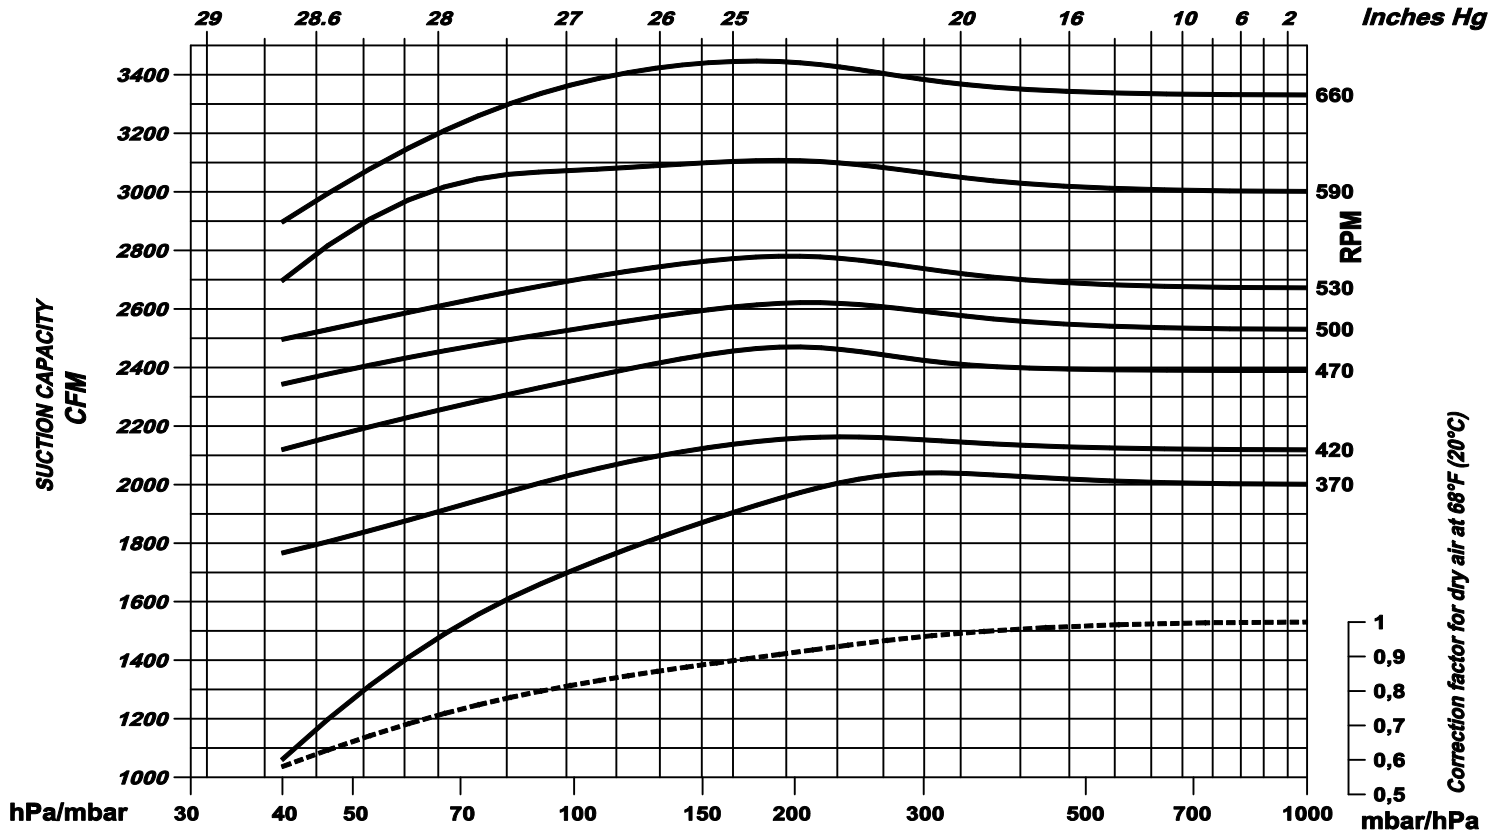

Service liquid at various inlet pressure					
RPM	>24" Hg Vac. USGPM	24" Hg Vac. USGPM	18" Hg Vac. USGPM	12" Hg Vac. USGPM	<12" Hg Vac. USGPM
660	63.8	52.8	44.0	39.6	24.2
590	57.2	46.2	41.8	37.4	22.0
530	52.8	41.8	35.2	30.8	19.8
500	50.6	39.6	33.0	28.6	17.6
470	46.2	37.4	30.8	26.4	16.7
420	41.8	33.0	28.6	24.2	16.3
370	37.4	30.8	26.4	22.0	13.2



Premier Fluid Systems
 Canadian Home of Travaini Pumps

4161 Morris Dr. - Unit 5 * Burlington * Ontario * L7L 5L5 * Website: www.pfspumps.com
 Tel: 1-800-461-2611 or 905-637-2611 * Fax: 905-333-4722 * email: info@pfspumps.com

DATE : MARCH 2002

N°.: 6.42