




Bareshaft Construction

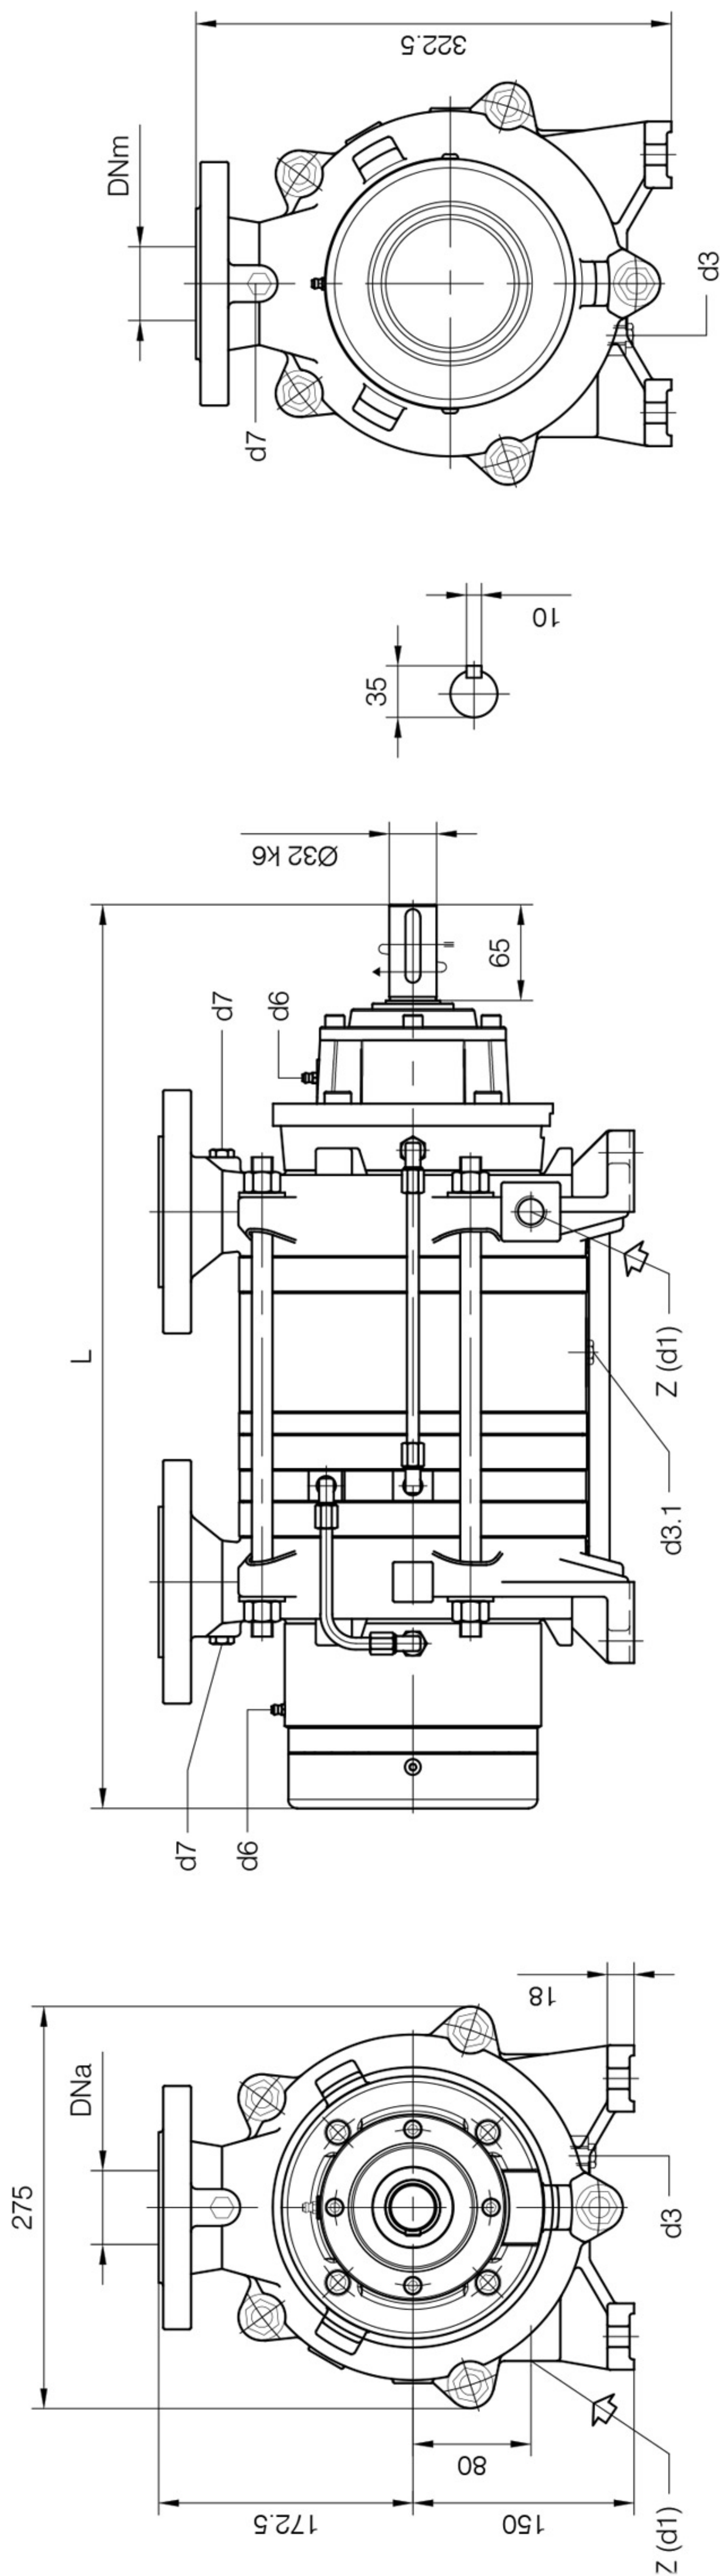

- d1 G 1/2 threaded connection - for liquid supply inlet
- d3 G 1/4 plugged connection - for pump casing drain
- d3.1 G 1/4 plugged connection - for pump casing drain
- d6 Greaser connection - for ball bearings lubrication
- d7 G 1/4 plugged connection - for auxiliary instrumentation

Pump type	Construction dimensions						Weight
	DNa	DNm	L	f4	m1	m2	
SAO G2D	50	50	583	221	331	301	83
SAO G2G	50	50	613	251	361	331	87

Schematic drawing. Dimensions in mm with tolerances according to EN 735-1995 standards.
Weights in Kgs, referred to pumps in cast iron without motor, not binding.

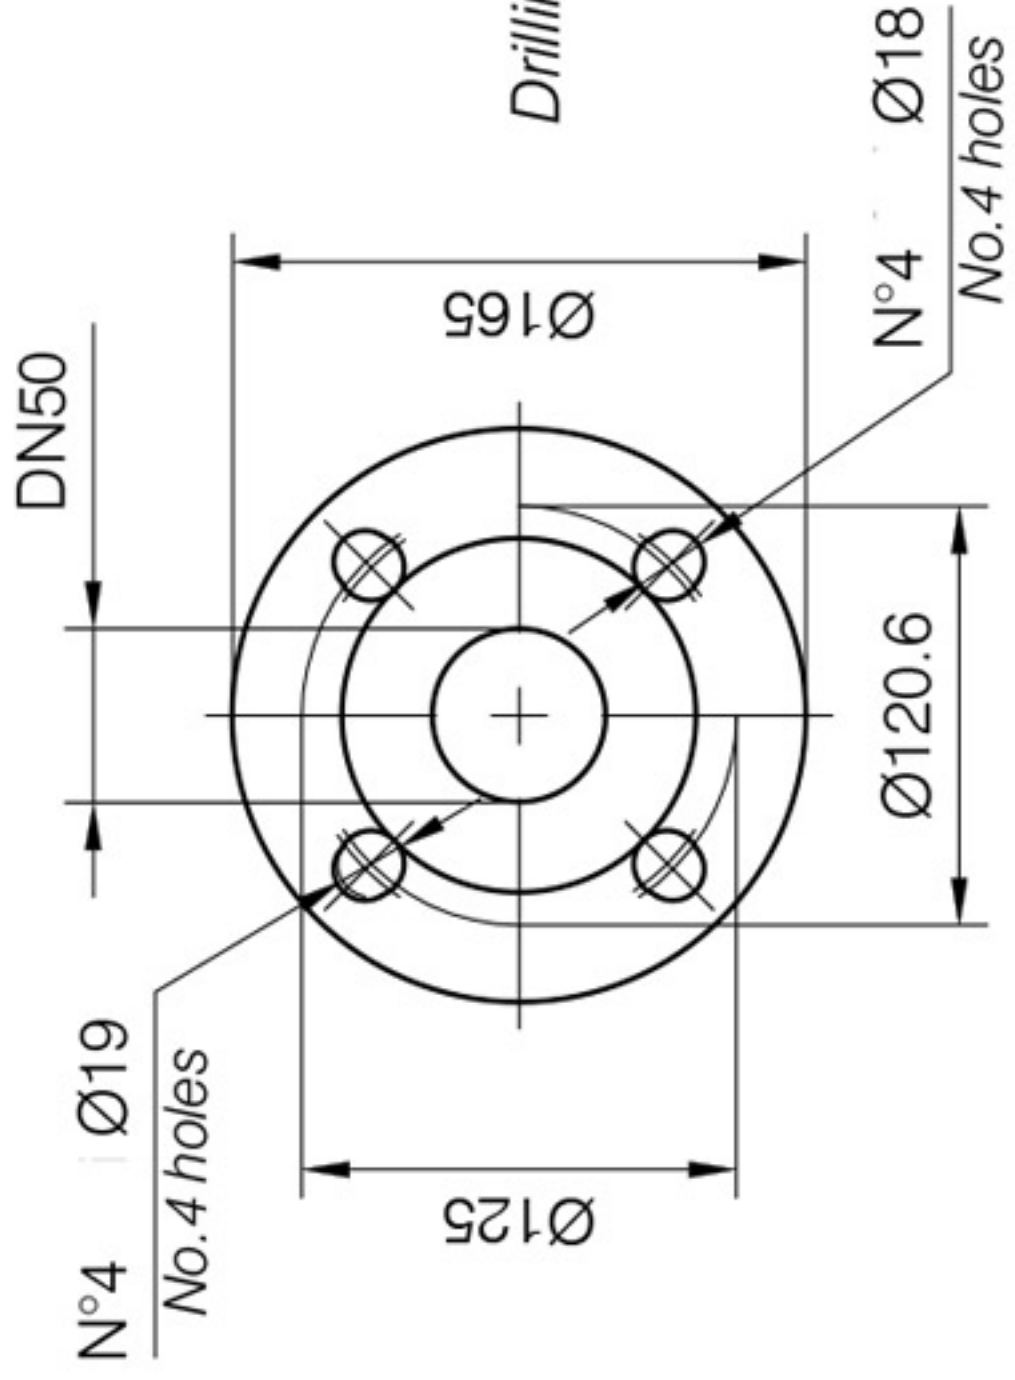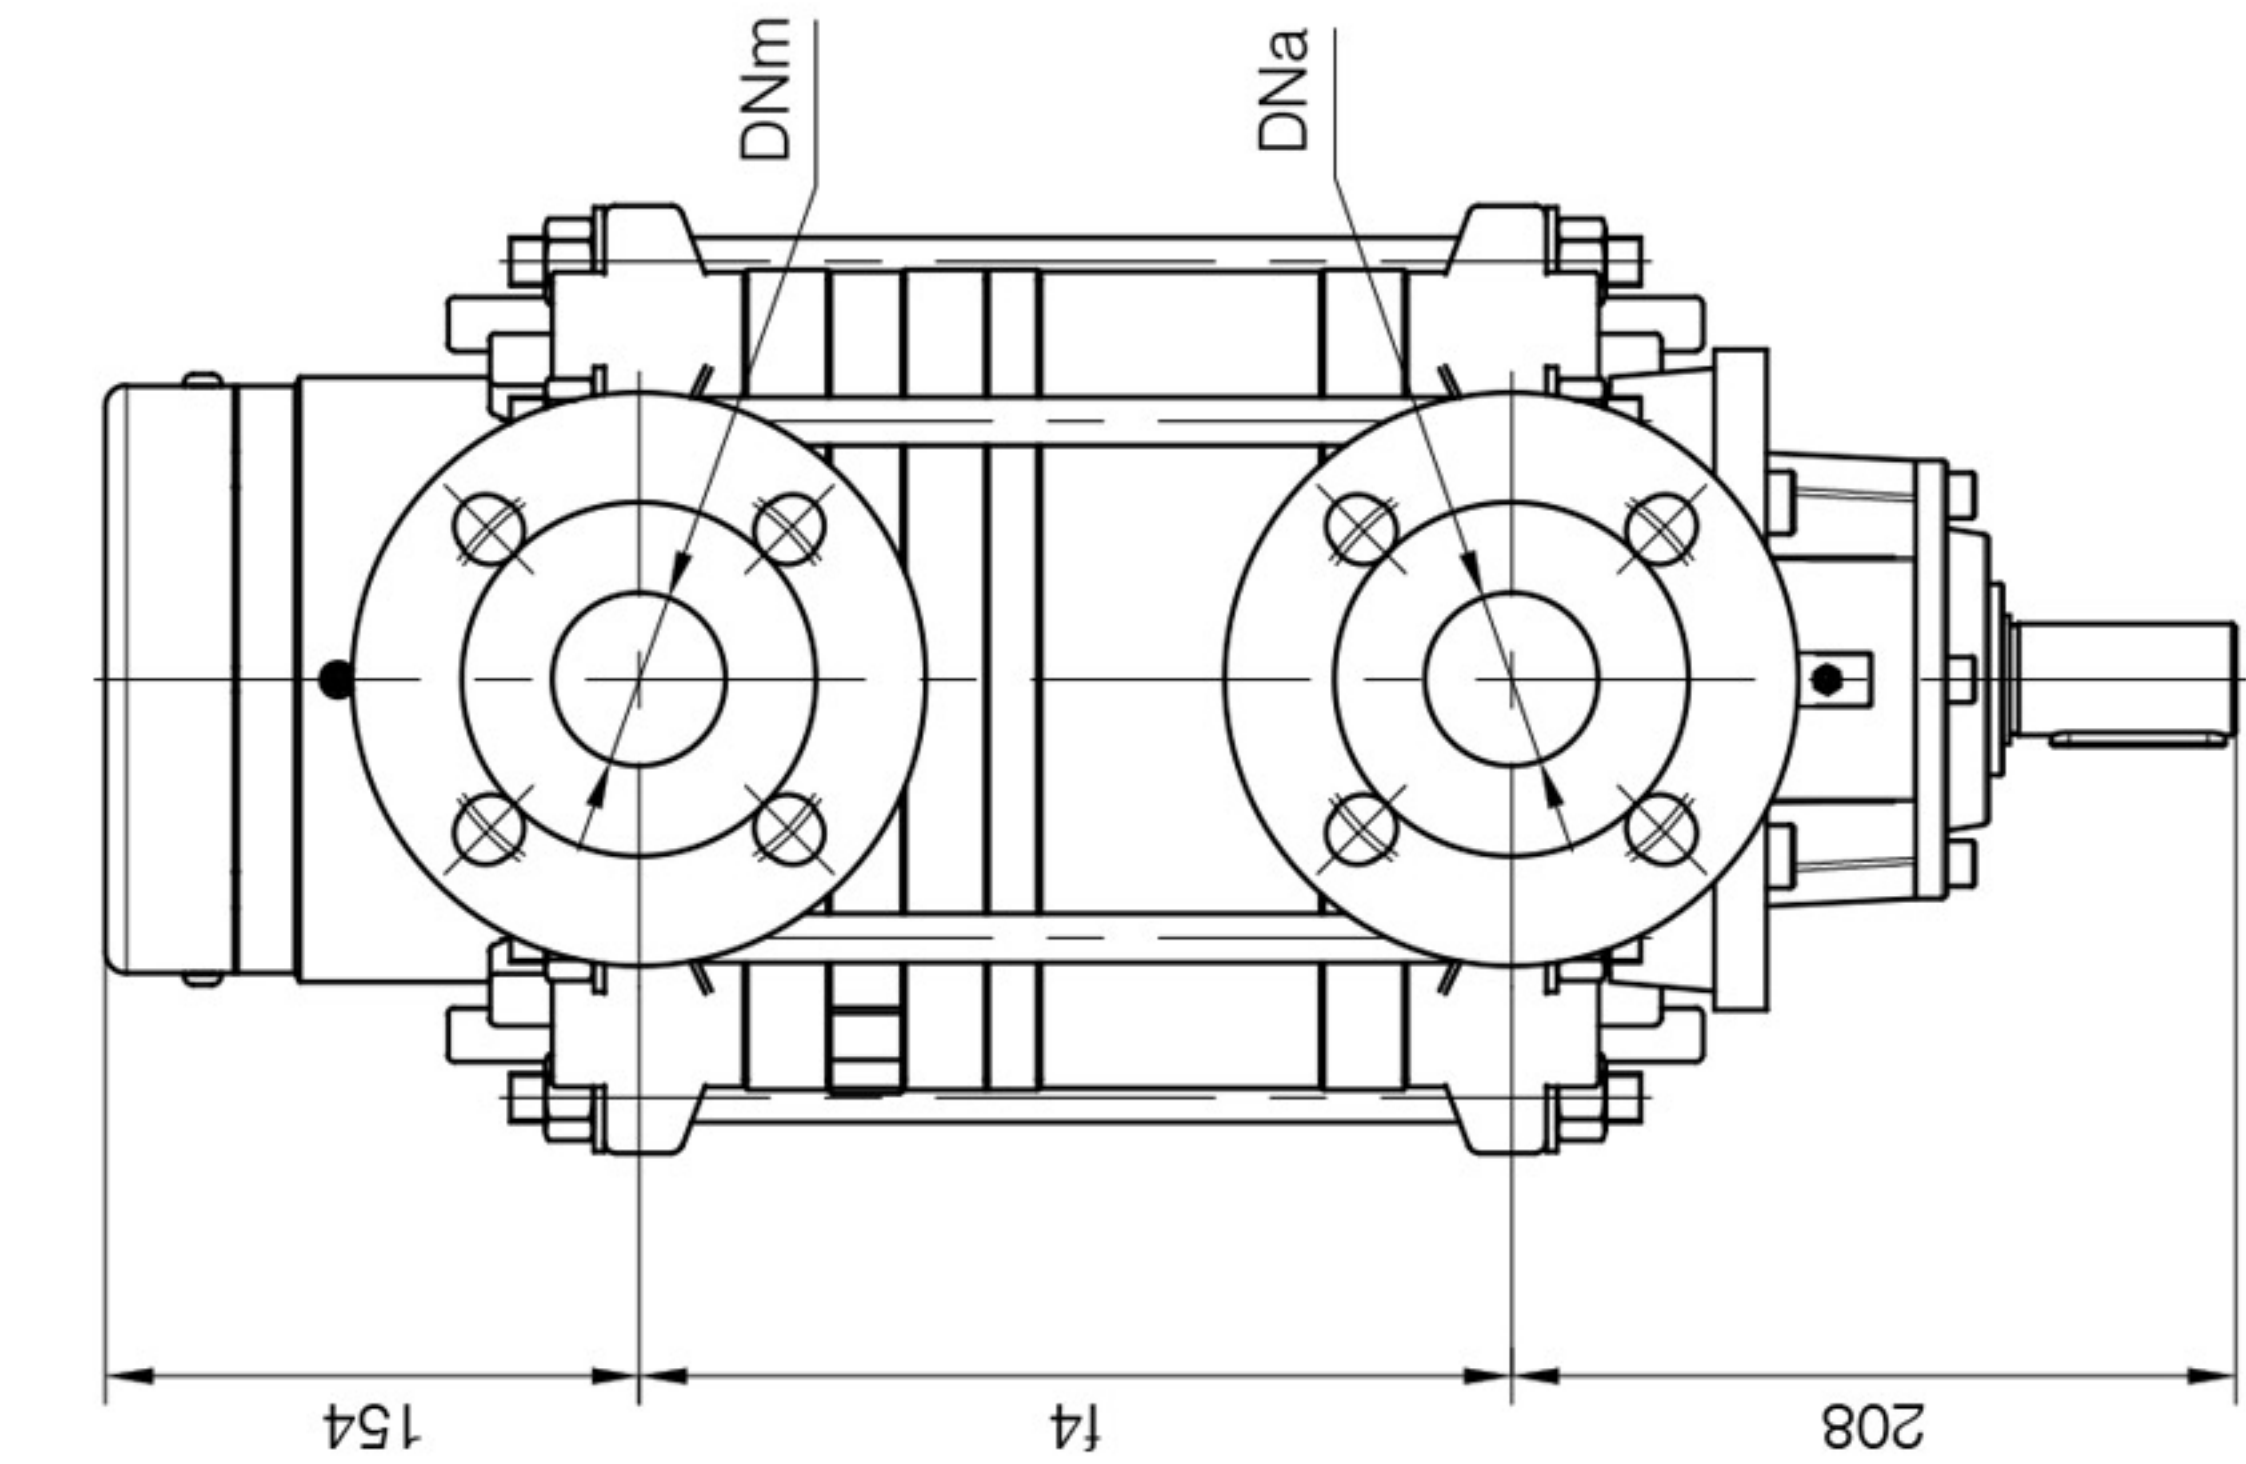

FLANGE SPECIALI / SPECIAL FLANGES
Drilling dimensions according to UNI 2223 NP16 and ANSI 150

Dimensions in mm and weights in kg

Flanges drilled to 150 lbs. ANSI dimensions



Premier Fluid Systems
Canadian Home of Travaini Pumps

4161 Morris Dr. - Unit 5 * Burlington * Ontario * L7L 5L5 * Website: www.pfspumps.com
Tel: 1-800-461-2611 or 905-637-2611 * Fax: 905-333-4722 * email: info@pfspumps.com

DATE : DECEMBER 2014

N°.: 11.10