

DATA BASED ON :

SATURATED AIR AT 68°F (20°C)

SERVICE LIQUID

WATER

SERVICE LIQUID TEMPERATURE

59°F (15°C)

DISCHARGE PRESSURE


1013 mbar

CAPACITY AND ABSORBED

POWER TOLERANCE: ±5%

**PERFORMANCE DATA
LIQUID RING VACUUM PUMP
TRAVAINI PUMP MODEL**

TRSK 2502

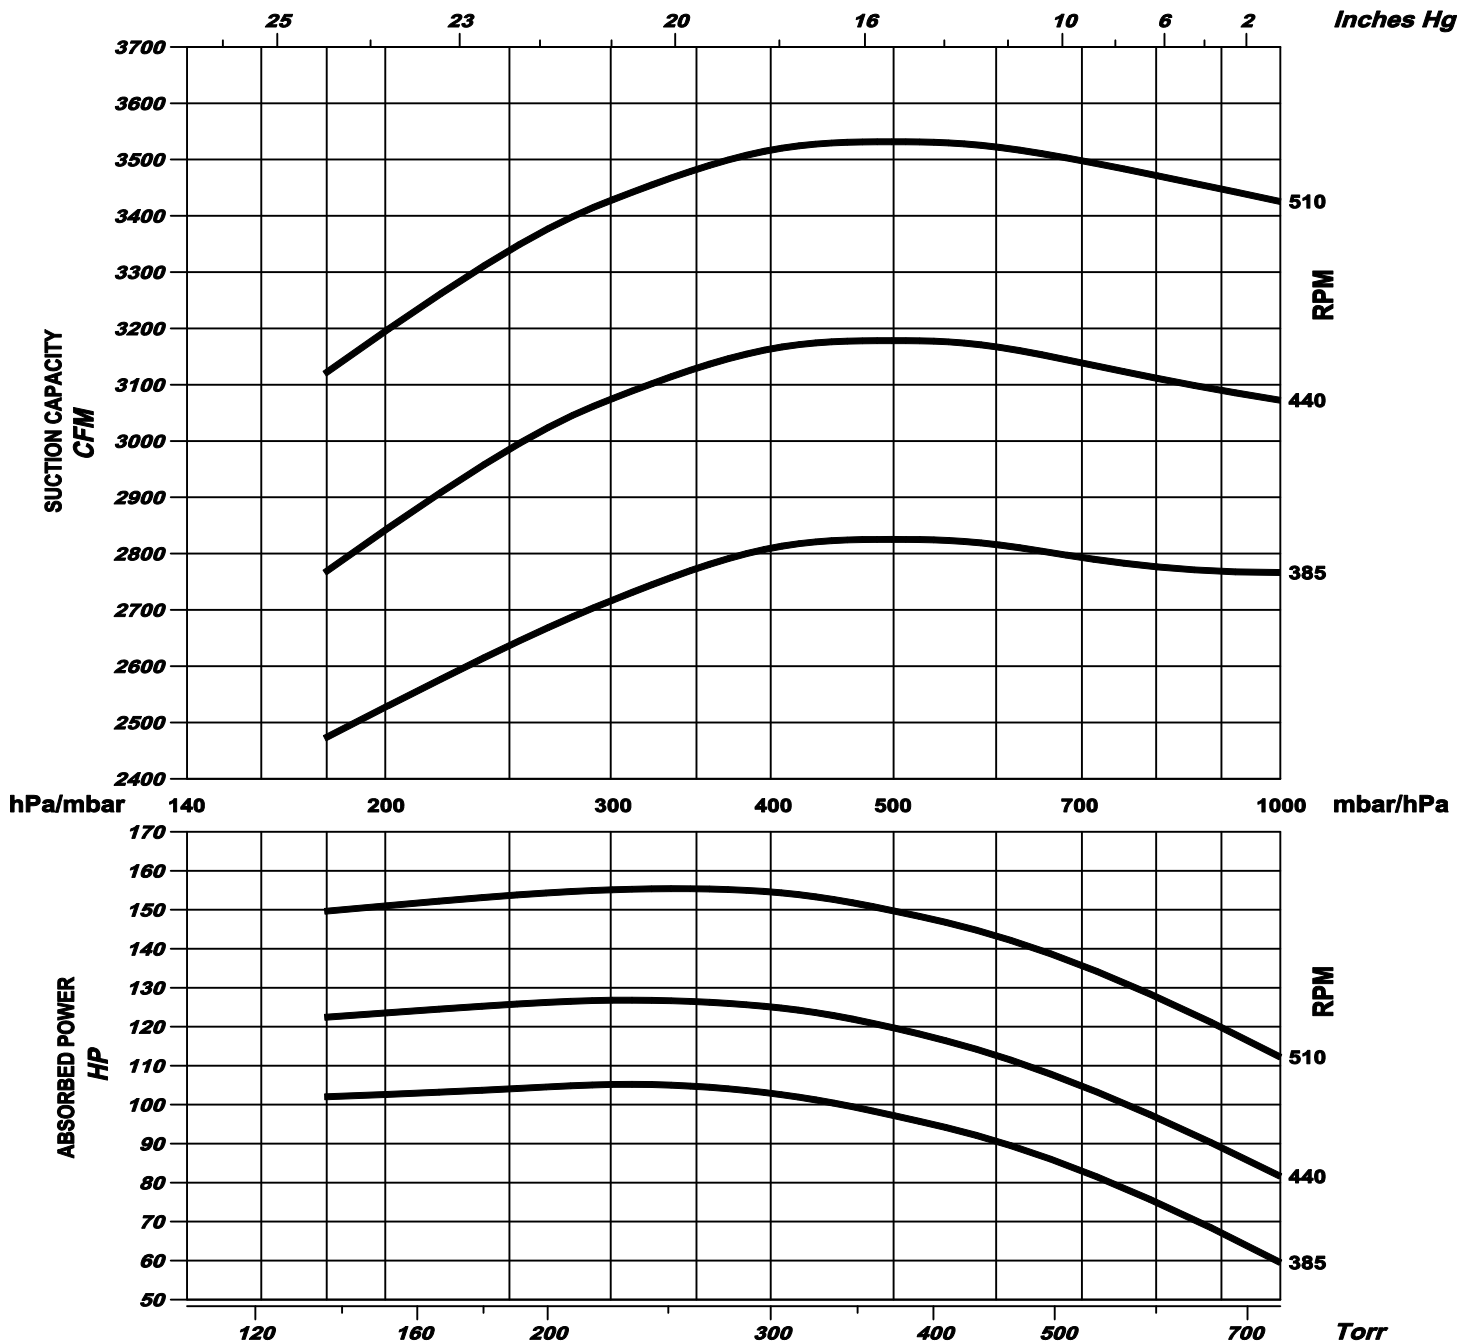

Service liquid at various Inlet pressure

RPM	24" Hg Vac. USGPM	18" Hg Vac. USGPM	12" Hg Vac. USGPM	<12" Hg Vac. USGPM
510	52.8	44.0	35.2	26.4
440	48.4	39.6	30.8	24.2
385	44.0	35.2	26.4	17.6



Premier Fluid Systems
Canadian Home of Travaini Pumps

4161 Morris Dr. - Unit 5 * Burlington * Ontario * L7L 5L5 * Website: www.pfspumps.com
Tel: 1-800-461-2611 or 905-637-2611 * Fax: 905-333-4722 * email: info@pfspumps.com

DATE : MARCH 2002

N°.: 5.34