



DATA BASED ON :

SATURATED AIR AT 68°F (20°C)  
 SERVICE LIQUID WATER  
 SERVICE LIQUID TEMPERATURE 59°F (15°C)  
 DISCHARGE PRESSURE 1013 mbar

CAPACITY AND ABSORBED  
 POWER TOLERANCE: ±5%

PERFORMANCE DATA  
 LIQUID RING VACUUM PUMP  
 TRAVAINI PUMP MODEL

TRVK 3503

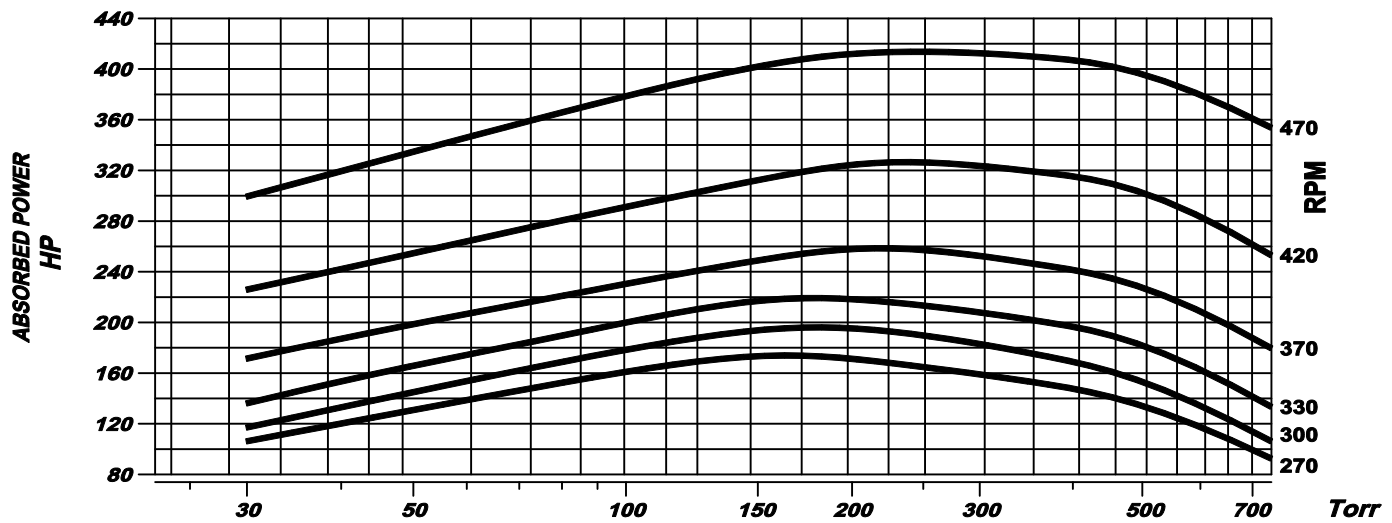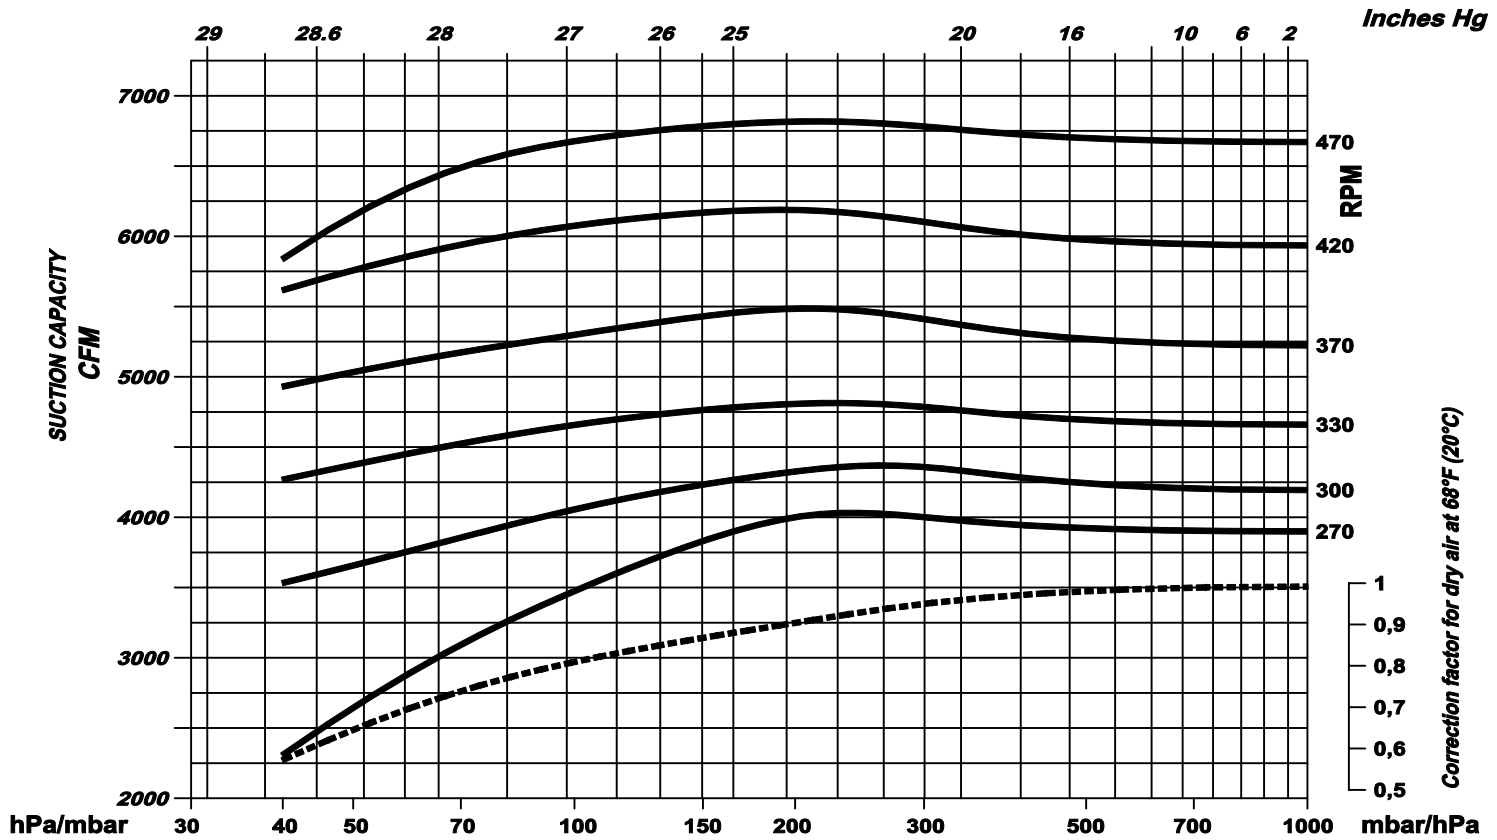

*Service liquid at various inlet pressure*

RPM	>24" Hg Vac. USGPM	24" Hg Vac. USGPM	18" Hg Vac. USGPM	12" Hg Vac. USGPM	<12" Hg Vac. USGPM
470	125.9	122.4	97.3	80.1	62.1
420	112.3	108.7	86.3	70.9	55.0
370	100.0	96.0	75.3	62.5	48.9
330	88.5	85.0	67.8	54.6	43.6
300	80.1	76.6	60.8	48.9	39.2
270	71.8	68.2	54.6	43.5	34.8



**Premier Fluid Systems**  
 Canadian Home of Travaini Pumps

4161 Morris Dr. - Unit 5 \* Burlington \* Ontario \* L7L 5L5 \* Website: [www.pfspumps.com](http://www.pfspumps.com)  
 Tel: 1-800-461-2611 or 905-637-2611 \* Fax: 905-333-4722 \* email: [info@pfspumps.com](mailto:info@pfspumps.com)

DATE : MARCH 2002

N°.: 6.45