


DATA BASED ON :

SATURATED AIR AT 68°F (20°C)
SERVICE LIQUID WATER
SERVICE LIQUID TEMPERATURE 59°F (15°C)
DISCHARGE PRESSURE 1013 mbar

CAPACITY AND ABSORBED POWER TOLERANCE: ±5%

**PERFORMANCE DATA
 LIQUID RING VACUUM PUMP
 TRAVAINI PUMP MODEL**

TRSK 5004

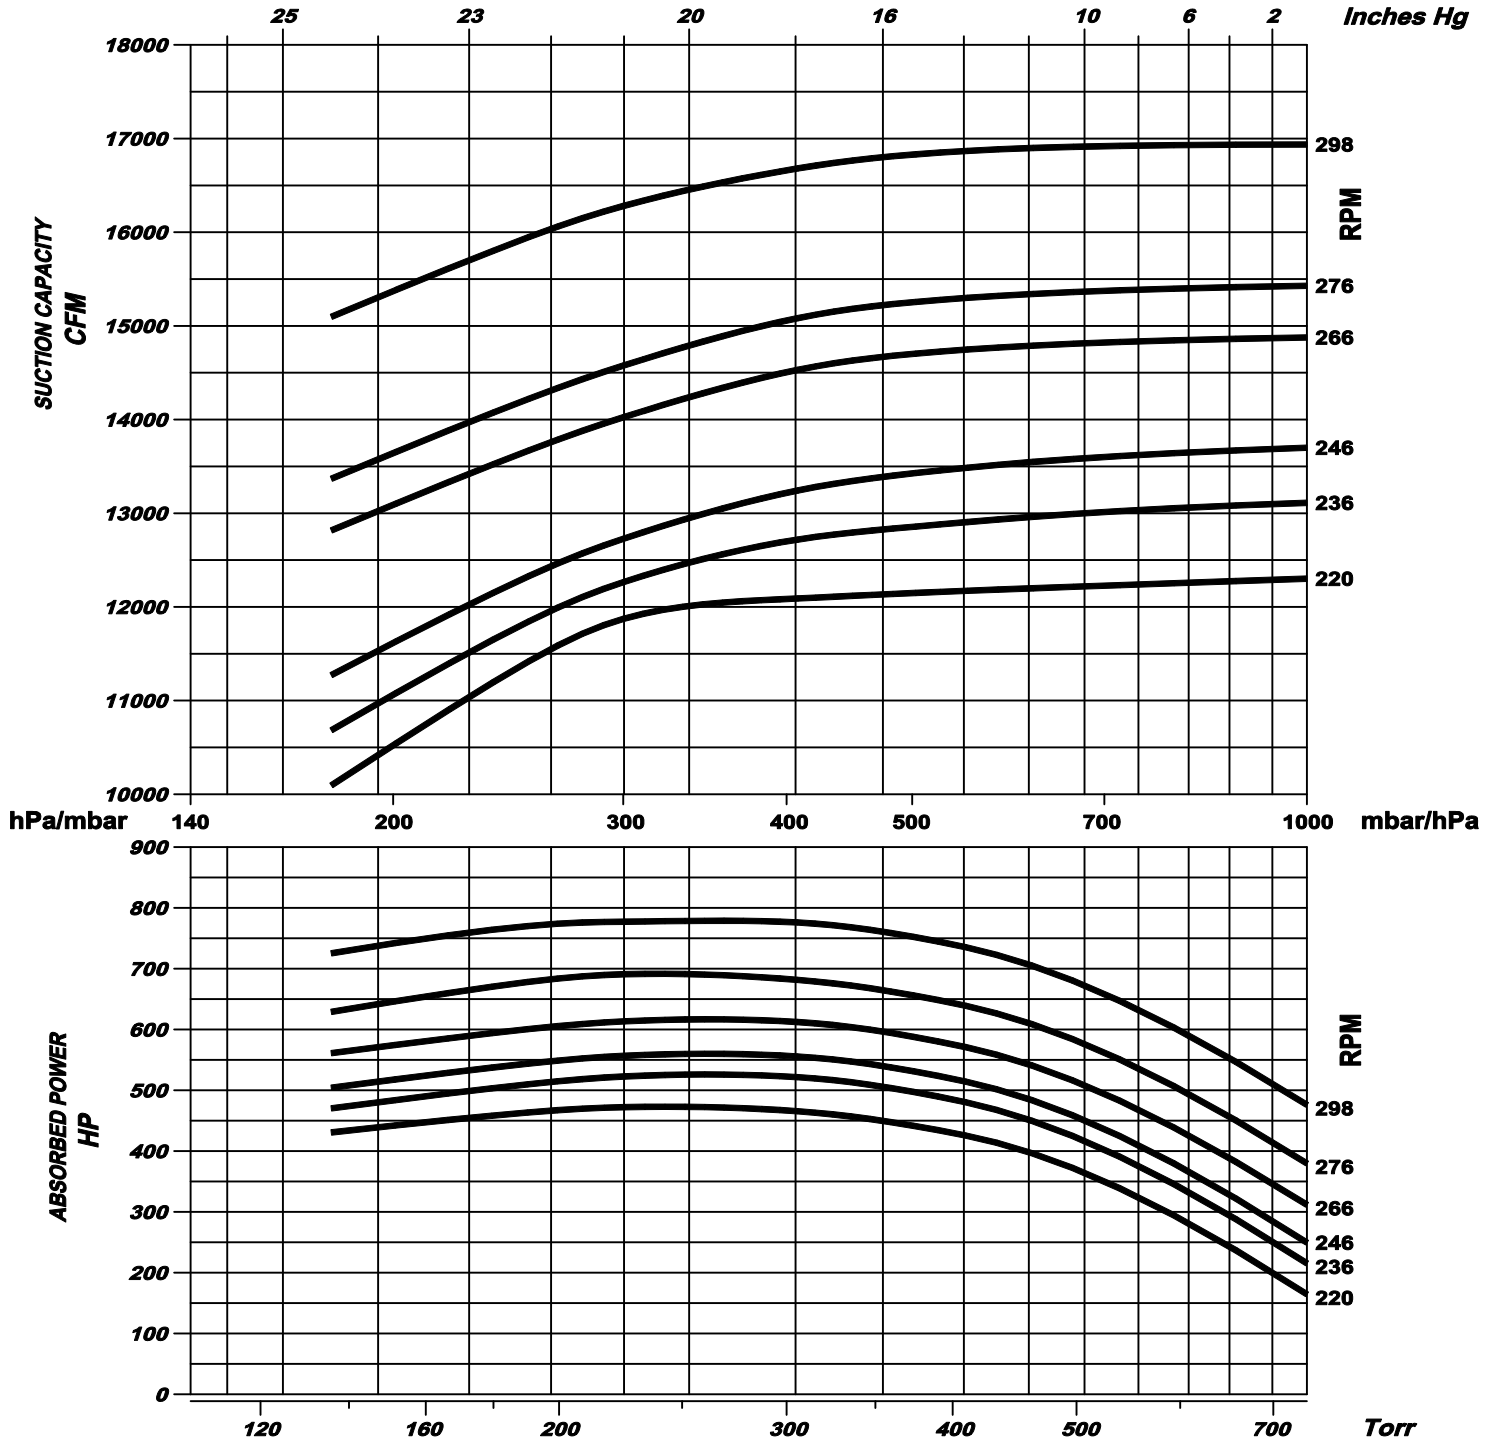

Service liquid at various inlet pressure				
RPM	24" Hg Vac. USGPM	18" Hg Vac. USGPM	12" Hg Vac. USGPM	<12" Hg Vac. USGPM
298	240.8	178.8	159.4	131.4
276	223.2	165.5	147.5	121.7
266	213.5	159.8	143.1	116.7
246	197.2	147.1	133.4	109.6
236	190.2	143.5	127.2	105.0
220	169.1	125.5	111.0	92.2



Premier Fluid Systems
 Canadian Home of Travaini Pumps

4161 Morris Dr. - Unit 5 * Burlington * Ontario * L7L 5L5 * Website: www.pfspumps.com
 Tel: 1-800-461-2611 or 905-637-2611 * Fax: 905-333-4722 * email: info@pfspumps.com

DATE : MARCH 2002

N°.: 5.47