
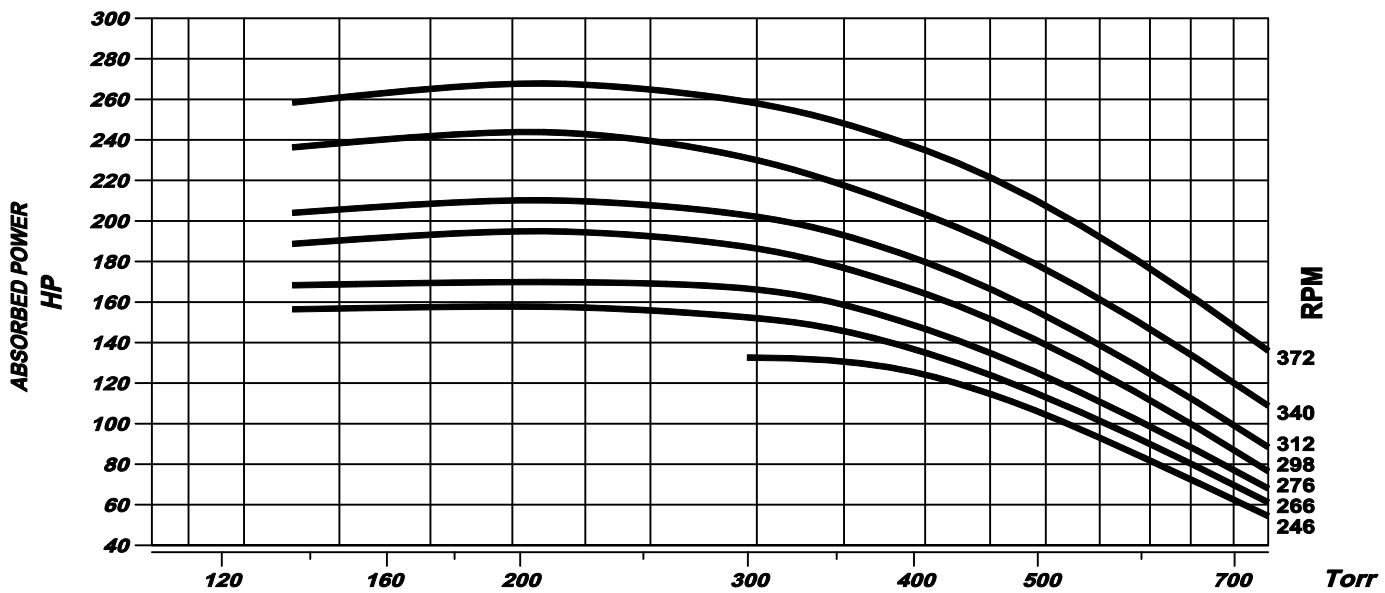


DATA BASED ON :

SATURATED AIR AT 68°F (20°C)
SERVICE LIQUID WATER
SERVICE LIQUID TEMPERATURE 59°F (15°C)
DISCHARGE PRESSURE 1013 mbar

CAPACITY AND ABSORBED POWER TOLERANCE: ±5%

PERFORMANCE DATA
 LIQUID RING VACUUM PUMP
 TRAVAINI PUMP MODEL
TRSK 3502

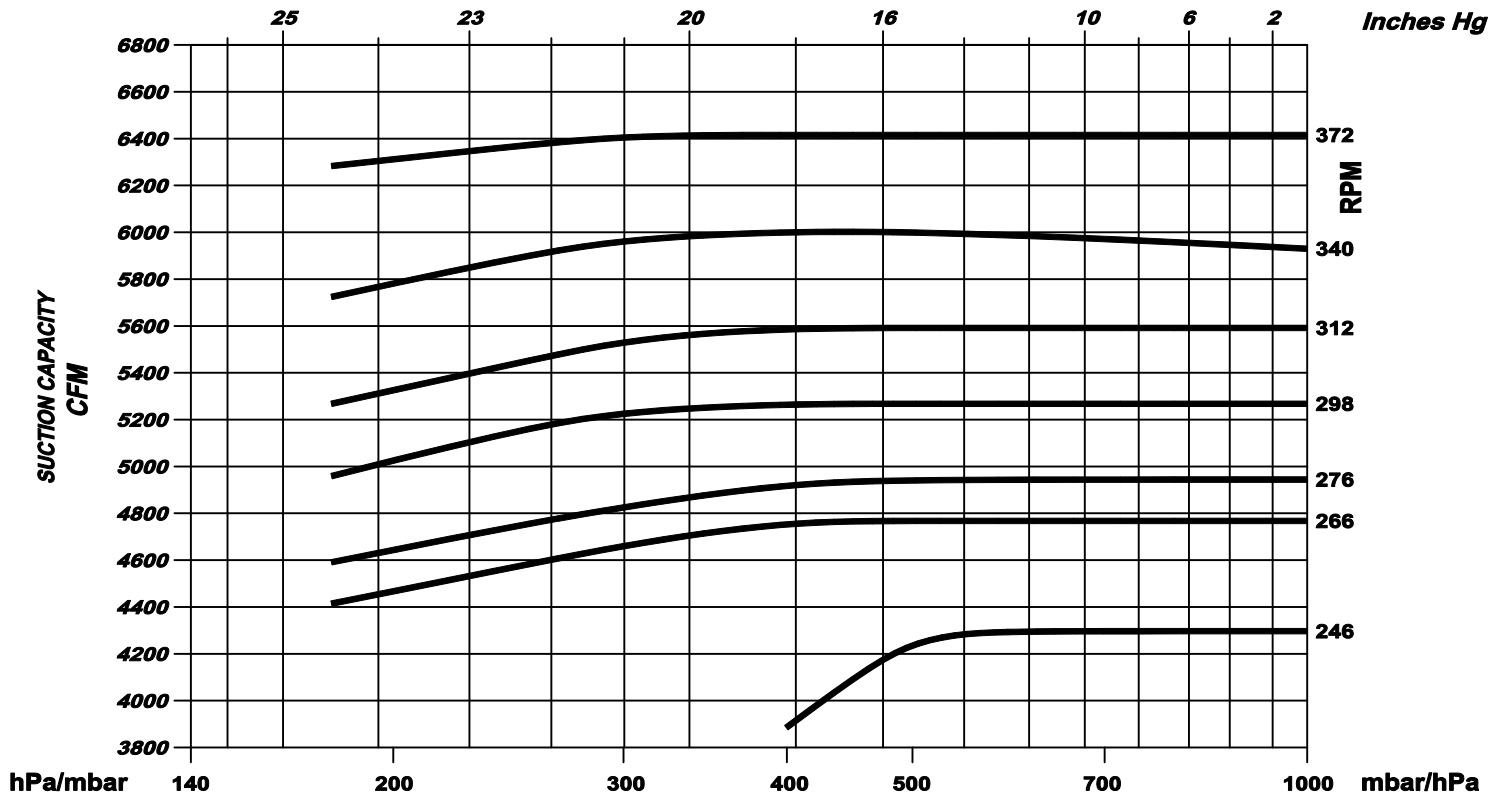

Service liquid at various Inlet pressure

RPM	24" Hg Vac. USGPM	18" Hg Vac. USGPM	12" Hg Vac. USGPM	<12" Hg Vac. USGPM
372	90.3	80.1	58.6	48.0
340	81.5	71.3	52.0	44.0
312	76.2	66.9	49.8	41.4
298	72.6	63.8	46.7	38.3
276	67.8	59.4	44.0	36.5
266	65.6	57.2	41.8	34.3
246	46.2	39.6	35.2	22.0



Premier Fluid Systems
 Canadian Home of Travaini Pumps

4161 Morris Dr. - Unit 5 * Burlington * Ontario * L7L 5L5 * Website: www.pfspumps.com
 Tel: 1-800-461-2611 or 905-637-2611 * Fax: 905-333-4722 * email: info@pfspumps.com

DATE : MARCH 2002

N°.: 5.40