



DATA BASED ON :

SATURATED AIR AT 68°F (20°C)
 SERVICE LIQUID WATER
 SERVICE LIQUID TEMPERATURE 59°F (15°C)
 DISCHARGE PRESSURE 1013 mbar

CAPACITY AND ABSORBED
 POWER TOLERANCE: ±5%

PERFORMANCE DATA
 LIQUID RING VACUUM PUMP
 TRAVAINI PUMP MODEL

TRVK 5003

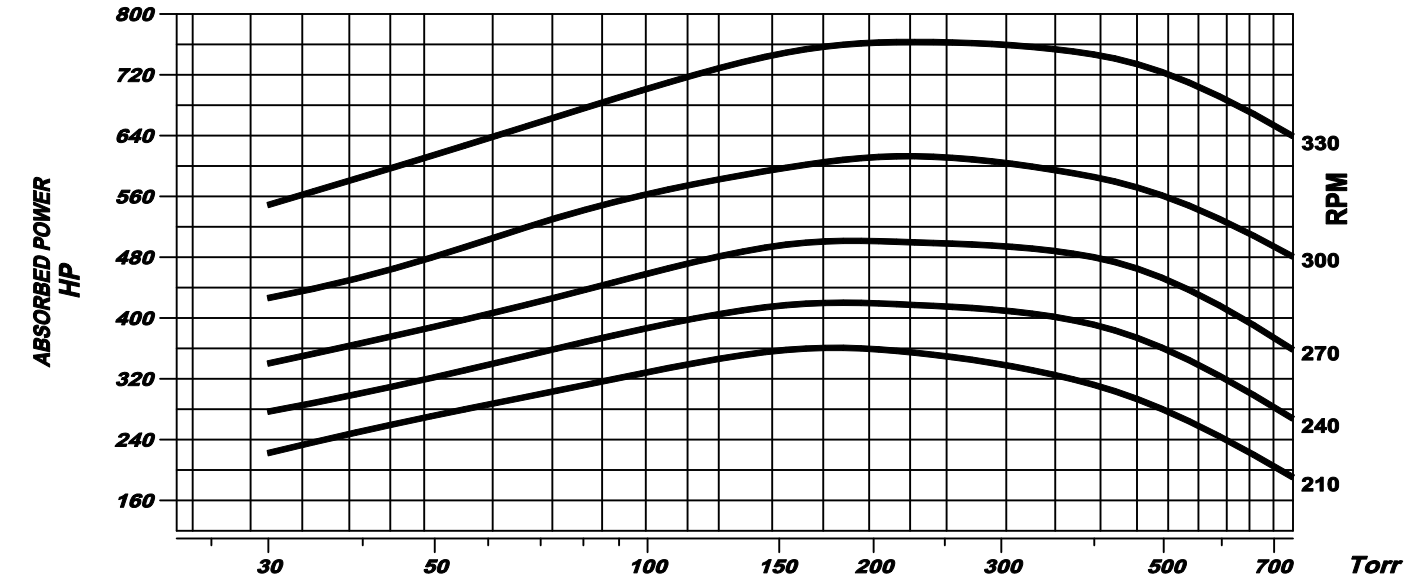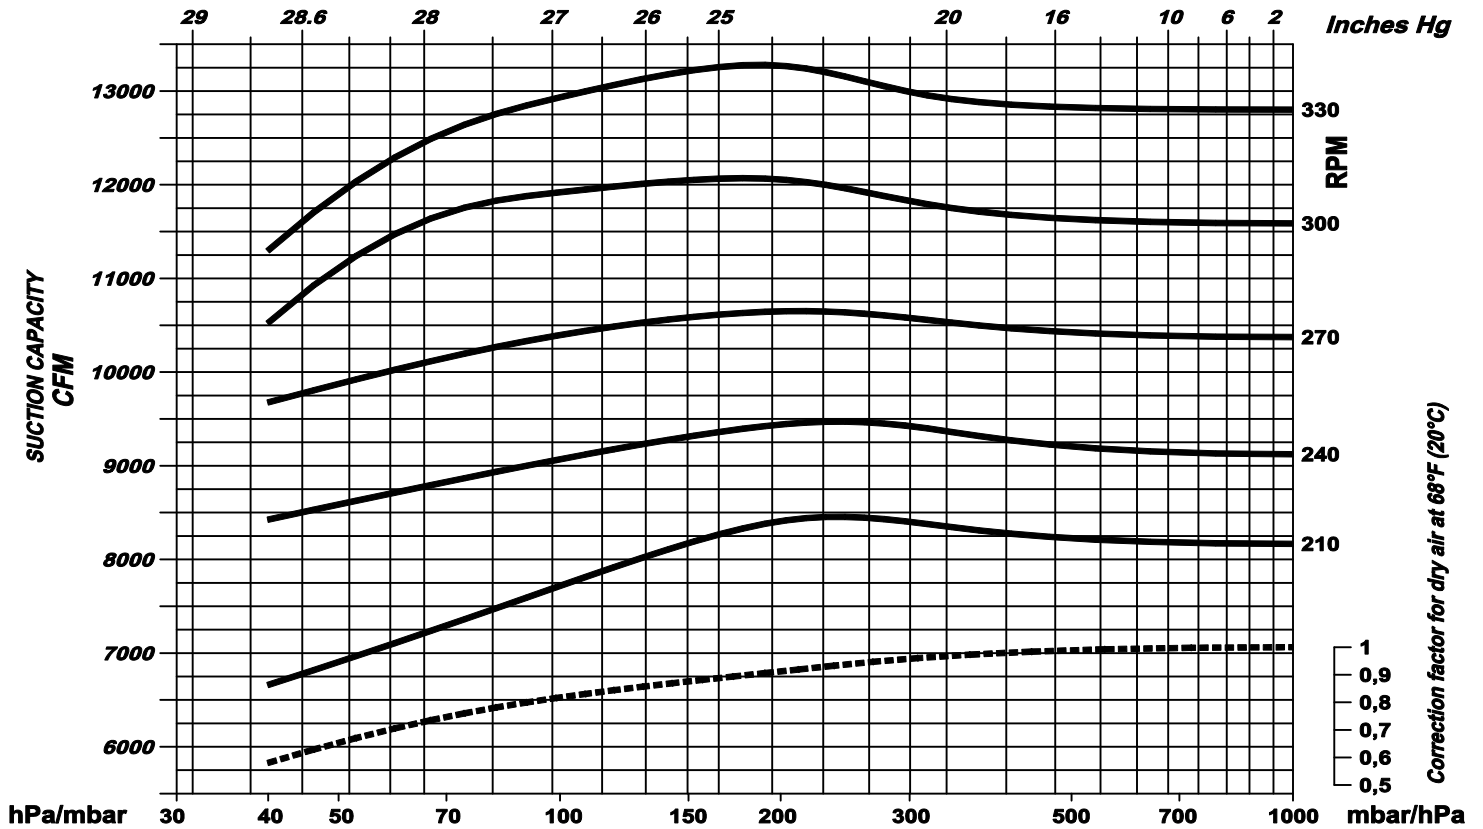

Service liquid at various inlet pressure					
RPM	>24" Hg Vac. USGPM	24" Hg Vac. USGPM	18" Hg Vac. USGPM	12" Hg Vac. USGPM	<12" Hg Vac. USGPM
330	236.9	192.4	160.3	117.1	96.2
300	214.0	173.9	144.9	106.1	87.0
270	191.1	155.9	129.0	94.7	77.5
240	169.5	139.1	114.5	84.1	68.9
210	151.0	124.1	102.1	74.9	61.4



Premier Fluid Systems
 Canadian Home of Travaini Pumps

4161 Morris Dr. - Unit 5 * Burlington * Ontario * L7L 5L5 * Website: www.pfspumps.com
 Tel: 1-800-461-2611 or 905-637-2611 * Fax: 905-333-4722 * email: info@pfspumps.com

DATE : MARCH 2002

Nº.: 6.48